

# SP-200

## AUTOMATIC SACHET PACKING MACHINE

### APPLICATION.

The machine is designed to produce a flat sachets (in system V) as well as upright sachets (in system W) and to pack a loose products, granulated products, fluid products and semi fluid products. The machine may be equipped with the weight feeder, screw feeder, volume feeder or feeder suitable for fluid and semi – fluid products, granulated product and powdered products.



### PACKAGING MATERIAL

- Lacquered paper + aluminum + polyethylene, laminar folis
- Packaging material width 460 mm, max
- External diameter of packaging material reel 500 mm, max
- Reel core diameter  $76 \pm 1$  mm
- Single load per sachet packaging machine 1 reel
- Half of reel width with sachet abverse (picture)
- The second half of reel with sachet reverse (printing + length mark)

Bag

Height 70 ÷ 230 mm

Width (single) 70 ÷ 200 mm

(double) 70 ÷ 100 mm



# SP-200



Dosing volume depends on bag size 500 ml, max  
Output (for machine working in 1 lane) 30 cycles/ minute, max  
Output (for machine working in 2 lanes) 60 pcs/ minute, max  
The SP-200 machine is built on self – supporting frame with protective guards.  
All components of the SP-200 machine which have direct contact with packed product are made of materials having certificate of P.Z.H.  
These components are readily dismantlable in order to facilitate replacement and washing. The machine is equipped in independent control of temperature for each sealing jaws and infinitely variable adjustment of speed.



# SP-200




## TECHNICAL/ OPERATING DATA:

- Supply
  - Power supply 3x380V/220V 50Hz
  - Compressed air supply 6 bars
- Installed power 5 kVA
- Compressed air consumption ca 0,3 m<sup>3</sup>/h
- Overall dimensions
  - Basic machine 1400mm x 6000mm x 900mm
- Weight
  - Basic machine 1000 kg.
- Protective system – earthed neutral
- Mechanical protection – guards
- Working conditions – general production room




# Wymiary opakowań dla SP-200


## Doypack

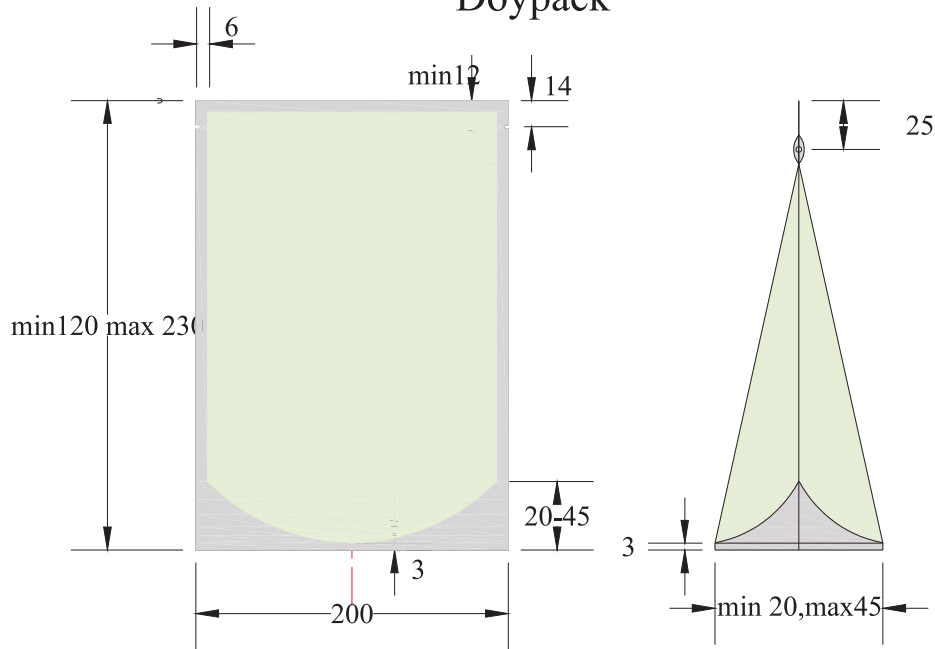


## Simplex

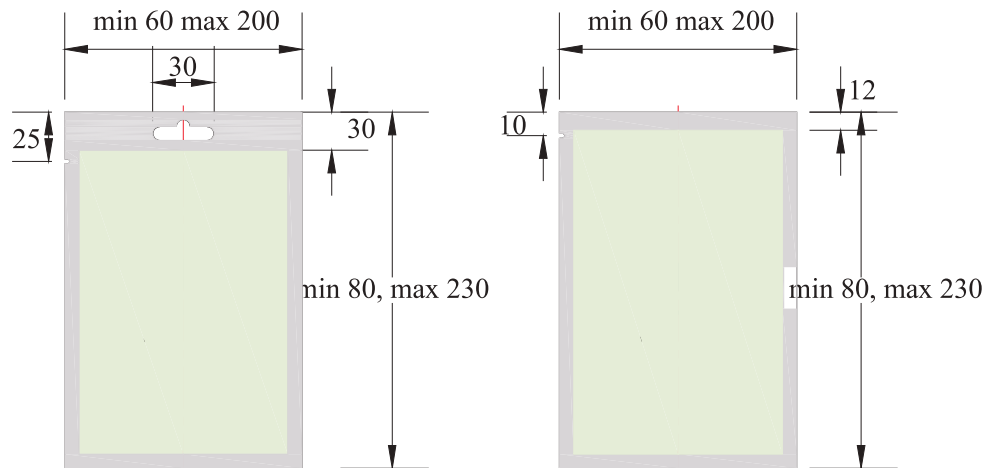

## Duplex

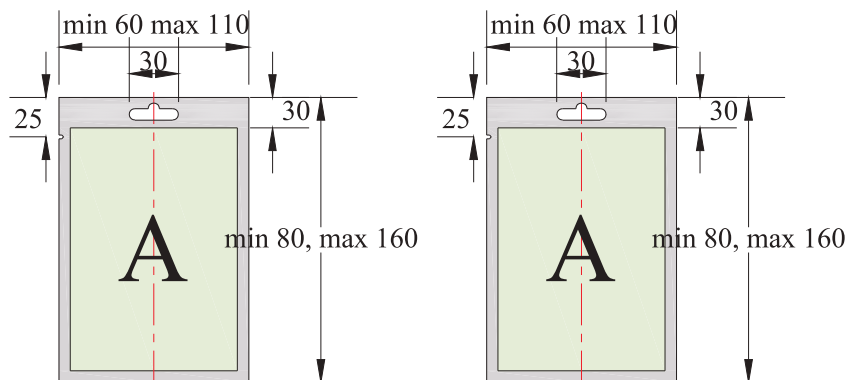

# Wykonanie specjalne opakowania dla SP-200

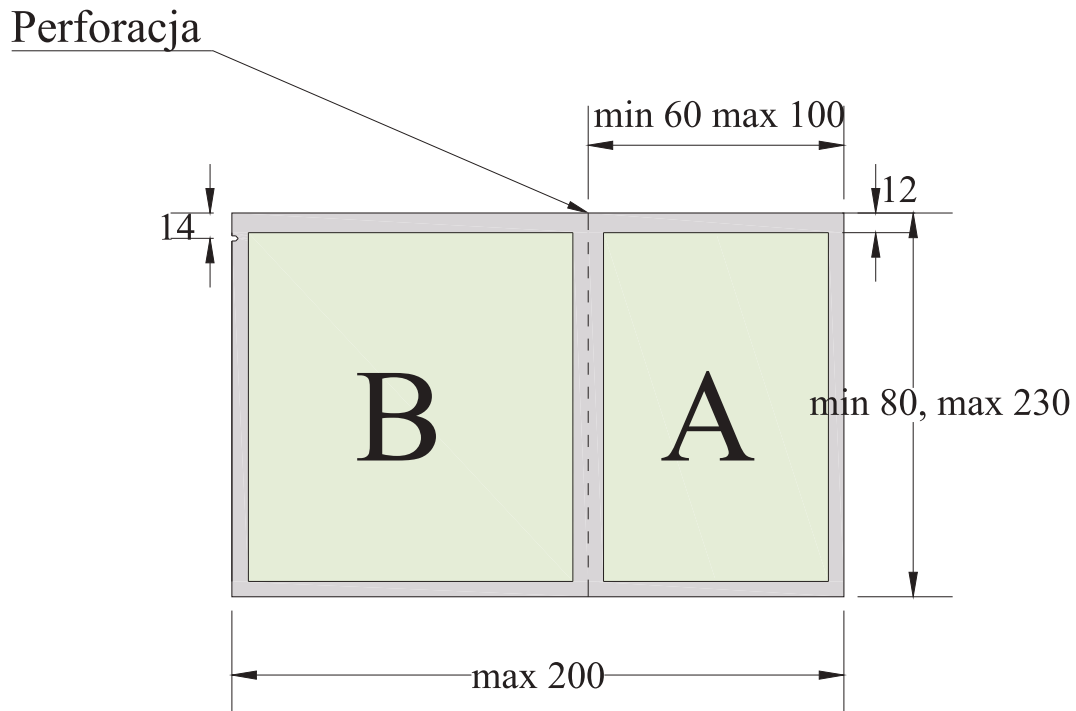

**Miflex Masz Sp. z o.o.**

99300 KUTNO, ul. Grunwaldzk:

Te148 2455 12 96

Fax 48 2455 12 95

[www.miflexmasz.com.pl](http://www.miflexmasz.com.pl)

e-mail: [miflexmasz@miflexmasz.com](mailto:miflexmasz@miflexmasz.com)

